

Extraview

5% openness

Extraview Sunscreen


Features

Extraview fabric is a high-quality solar protection fabric with a 1 x 2 basket weave construction. With a 5% openness factor this sunscreen provides a level of daytime privacy and UV control.

Care Instructions

Dusting with a feather duster is all that is required to keep your fabric looking good. Dirt and grime can be removed by simply wiping fabric skins with a sponge soaked in lukewarm water. If marks are still visible, add a little detergent. Then dry gently with a clean cloth.

Colour Options

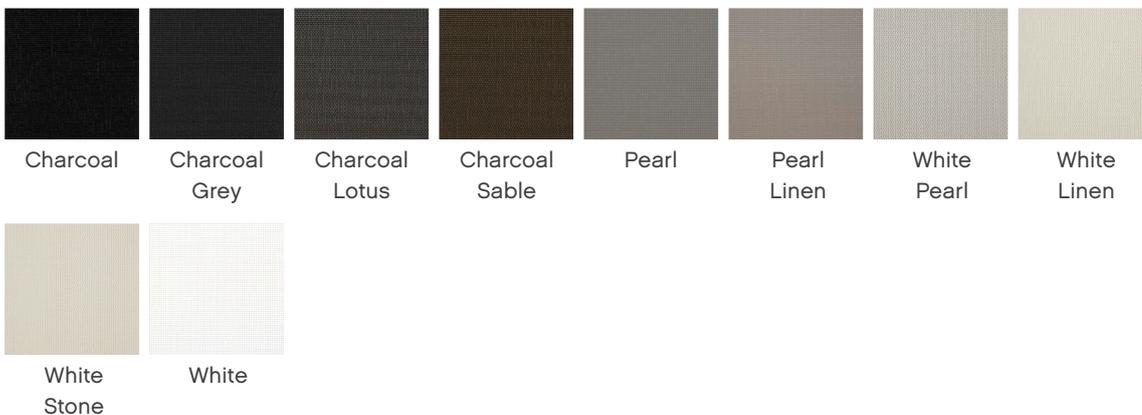

Extraview 5% openness Sunscreen

Technical information

Fabric Density	Semi Transparent
Composition	36% FibreGlass, 64% PVC
Weight	400gsm ± 5%
Thickness	0.52mm ± 10%
Width	3100mm
Colour Fastness	6-7 (AS 2001.4.21)
Flame Retardancy	Independently tested to AS1530 part 2. Flammability Index: 1 Range [1-20]
Weave	2 x 1 Basketweave
Organic emissions (VOC)	Does not exceed the maximum VOC (Volatile Organic Compound) criteria specified by the Green Building Council of Australia (IEQ-11).
Product Options	Roller Blinds

Fabric colour	Charcoal	Charcoal Grey	Charcoal Lotus	Charcoal Sable	Pearl
---------------	----------	---------------	----------------	----------------	-------

Optical/Light properties

	Charcoal	Charcoal Grey	Charcoal Lotus	Charcoal Sable	Pearl
Visual Light Transmittance	3%	5%	5%	5%	7%
Openness factor (nominal)	5%	5%	5%	5%	5%

Heat/Solar properties


	Charcoal	Charcoal Grey	Charcoal Lotus	Charcoal Sable	Pearl
Solar transmittance	3%	6%	6%	6%	10%
Solar reflectance	4%	8%	14%	13%	33%
Solar absorbance	93%	86%	80%	81%	57%

G-value / Solar heat gain coefficient

	Charcoal	Charcoal Grey	Charcoal Lotus	Charcoal Sable	Pearl
Glazing Type - Single 4mm Clear Glass	0.69	0.67	0.64	0.64	0.53

For more information please contact New Zealand Window Shades on 0800 223 224 or <http://www.luxaflex.co.nz/contact-us>

Colour options presented with data specifications

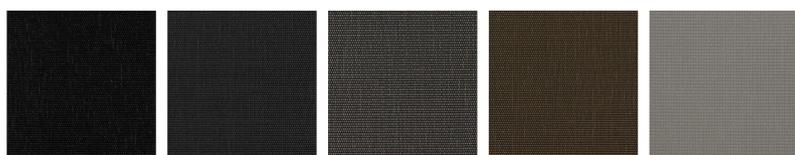

Charcoal Charcoal Grey Charcoal Lotus Charcoal Sable Pearl

New Zealand Window Shades Ltd.
 PO Box 12 785, Penrose, Auckland 1642, New Zealand
 Luxaflex® is a division of New Zealand Window Shades Ltd.
 ©Copyright 2019 New Zealand Window Shades Ltd.



Fire retardant
 AS1530 part 2

Luxaflex®

Extraview 5% openness Sunscreen

Technical information

Fabric Density	Semi Transparent
Composition	36% FibreGlass, 64% PVC
Weight	400gsm ± 5%
Thickness	0.52mm ± 10%
Width	3100mm
Colour Fastness	6-7 (AS 2001.4.21)
Flame Retardancy	Independently tested to AS1530 part 2. Flammability Index: 1 Range [1-20]
Weave	2 x 1 Basketweave
Organic emissions (VOC)	Does not exceed the maximum VOC (Volatile Organic Compound) criteria specified by the Green Building Council of Australia (IEQ-11).
Product Options	Roller Blinds

Fabric colour	Pearl Linen	White Pearl	White Linen	White Stone	White
---------------	----------------	----------------	----------------	----------------	-------

Optical/Light properties

Visual Light Transmittance	9%	12%	15%	18%	16%
Openness factor (nominal)	5%	5%	5%	5%	5%

Heat/Solar properties

Solar transmittance	12%	15%	19%	21%	19%
Solar reflectance	39%	52%	61%	61%	71%
Solar absorbance	49%	33%	20%	18%	10%

G-value / Solar heat gain coefficient

Glazing Type - Single 4mm Clear Glass	0.50	0.43	0.38	0.38	0.32
---------------------------------------	------	------	------	------	------

For more information please contact New Zealand Window Shades on 0800 223 224 or <http://www.luxaflex.co.nz/contact-us>

Colour options presented with data specifications



New Zealand Window Shades Ltd.
 PO Box 12 785, Penrose, Auckland 1642, New Zealand
 Luxaflex® is a division of New Zealand Window Shades Ltd.
 ©Copyright 2019 New Zealand Window Shades Ltd.



Fire retardant
 AS1530 part 2

